





## IUG – TYP 243809.0

Základní dodávka obsahuje:  
 Grundauführung enthält:  
 Basic delivery contains:  
 Livraison de base contient:  
 Основная поставка включает:




M2 IUG



DIN 6350

M2 IUG

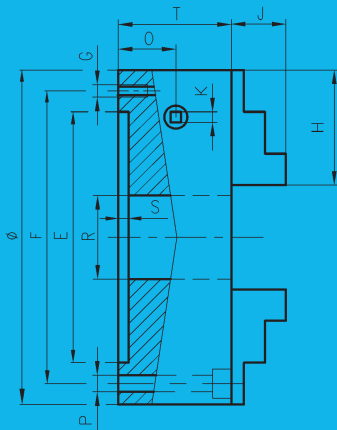

DIN 6350

ø	3 Ł		4 Ł		6 Ł					
	SUPERIOR	STANDARD	SUPERIOR	STANDARD	SUPERIOR					
	kg		kg		kg					
80	M2 083120	1,1	083220	1,1	084120	1,1	084220	1,1	—	—
100	M2 103120	2,2	103220	2,2	104120	2,2	104220	2,2	—	—
125	M2 123120	3,7	123220	3,7	124120	3,6	124220	3,6	126120	3,7
160	M2 163120	6,6	163220	6,6	164120	6,6	164220	6,6	166120	6,7
200	M2 203120	12,6	203220	12,6	204120	12,6	204220	12,6	206120	13,0
250	M2 253120	21,5	253220	21,5	254120	21,6	254220	21,6	256120	22,7
310	M2 313120	35,8	313220	35,8	314120	36,0	314220	36,0	316120	37,5
400	M2 403120	70,5	403220	70,5	404120	71,0	404220	71,0	406120	81,8
500	M2 503120	135,6	503220	135,6	504120	137,4	504220	137,4	506120	140,6

ø	E H6	F±0,2	G	H	J	K	O	P <sup>1)</sup>	P <sup>2)</sup>	S	T	R
80	56	67	3×M6	35,5	13	6	16,5	—	3×7	3	45	15
100	70	83	3×M8	41,5	17	8	18,0	—	3×9	3	52	20
125	95	108	3×M8	51,5	19	8	22,0	4×9	3×9	4	58	32
160	125	140	3×M10	66,0	23	9	22,0	4×11	3×11	4	62	42
200	160	176	3×M10	74,0	29	11	27,5	4×11	3×11	4	76	55
250	200	224	3×M12	97,5	33	12	29,5	4×13	3×13	5	82	76
310	260	286	3×M16	123,0	40	14	35,0	4×13	3×13	5	100	103
400	330	362	3×M16	152,5	50	17	39,0	4×17	3×17	7	110	136
500	420	458	6×M16	188,5	54	17	43,0	8×17	3×17	8	120	190

1) pro 4čelistní provedení M2  
 für 4-Backen Ausführung M2  
 for 4-jaw execution M2  
 pour l'exécution M2 à 4 mâchoires  
 Для 4-кулачкового проведения M2

2) pro 3 a 6čelistní provedení M2  
 für 3 und 6-Backen Ausführung M2  
 for 3 and 6-jaw execution M2  
 pour l'exécution M2 à 3 et 6 mâchoires  
 Для 3 и 6-кулачкового проведения M2